



assembly of modern and trendy laminates suiting the

needs of a classic attic and even contemporary abodes.

COLLECTION

Available in Size: 2440mm x 1220mm (8 Feet x 4 Feet)

Thickness : **1.3 mm - 1.5 mm**

(+-10% **Variation**)

APPLICATIONS

- Kitchen Work tops Tables Doors shelves Cabinets Trolleys
- Bathroom Work Tops Shelves Cabinets Furniture Heathcare
- Wall Lining and Horizontal Surfaces Lockers Cabinets Trolleys
- Commercial Hospitality & Restaurant Tables Counter Tops Doors
- Cubicles Lockers Cabinets Wall Cladding & Partition

GENERAL USE & CARE GUIDE

GLOIRIO laminates are manufactured with aesthetics and durability in mind. When used as recommended and with appropriate care, our laminates will last through the years. **GLOIRIO** laminate are easy to maintain.

LAMINATES

- Cleaning Should be done with water and a clean, non-abrasive cloth.
- To remove more stubborn stains, use mild household cleansers like colin IP gently wipe down with a non-abrasive cloth.
- Avoid the use of abrasive liquid cleansers, bleaching compounds or solution as these may damage the surface of the laminate.
- Do not place hot cookware directly on the laminate. Prolonged exposure to temperatures above 30° degree Celsius may cause damage to the laminate surface.
- Do not use the laminate for purposes that it is not intended for (E.g. do not iron, chop, hammer or expose the laminate to open flame.)
- Outdoor application of the laminate with exposure to direct sunlight and weather conditions are strict not recommended.
- UV rays may deshape the laminate.
- Gloss surfaces are recommended only for vertical application.
- Do not use thinner and loluene on the surface of the **GLOIRIO** laminates. this may cause decourisation of the surface.
- Store the laminates at temperature below 30° degree celsius.
- Typically confirm to internationally recognize technical standards.
- Have a thickness balance of +/- 10%
- Peel off the protective film after processing.





To avoid the problems of appearing air bubbles and any yellow colour/dullness or yellow patches problem in the laminate sheet after installation of GLOIRIO laminate, Customer should know the some facts befor buying GLOIRIO laminate.

As GLOIRIO laminate is 6H Acrylic laminate which have the scratch resistance characteristic and looks like back painted glass or colour lamination

Please Follow some fact about installation of GLOIRIO laminate.

- Please check the laminate at the time of delivery, check whether it was not damage in transportation & handling and then use for installation.
- Before installing GLOIRIO laminate make sure that sustrate (Plywood MDF, Particle Board) is good and superior quality of calibrated thickness and even surface.
- If there is usage of any inferior quality or not as per standard quality dipped plywood and dipped lipping patti, kindly scrub dipped colour layer by using sand paper. Then use GLOIRIO laminate to avoid yellow colour patches.
- Clean the surface of substrate (Plywood, MDF, Particle Board) to make free from dust of grease by cloth, soft brush, sponge or sand paper.
- Always use water base PVACP (Polyethylene Vinyl-Acetate Co-Polymer)
 Adhesive like GLOIRIO BOND for GLOIRIO laminate.
- Stir the adhesive before using it, and do not mix water in adhesive.
- Spread the adhesive uniformly by brush, roller or adhesive spreader on both GLOIRIO laminate and substrate (Plywood, MDF, Particle Board).
- Please do not use the GLOIRIO laminate more than 4 Ft x 2 Ft Also leave at least 2mm of groove. between two pieces of GLOIRIO laminate, so that at the time of pressing it will be easy for removing air from between of GLOIRIO laminate and substrate (Plywood, MDF, Particle Board)
- Use soft pinch roller or normal pressing technique at the time of pressing GLOIRIO laminate on the substrate (Plywood, MDF, Particle Board). And also pressing should be done from the middle of the panel and move towards to side line and corners of panel. So that air between the GLOIRIO laminate and substrate (Plywood, MDF, Particle Board) will Removed.
- Please make sure, to give sufficient amount of pressing to GLOIRIO Laminate for almost 12hrs to 15hrs to achieve full bonding strength.
- Please do not use synthetic rubber adhesive (SR, JAT Pat, Bostic, Heatxetc.)
- After the installation of GLOIRIO Laminate please avoid the direct sunlight on it.
- Please don't place hot cookware dictly on the GLOIRIO Laminate. Prolonged exposure to temperature above 30^oC may cause patches to GLOIRIO Laminate.

IMPORTANT INFORMATION

WHY AIR BUBBLE APPEARS IN BETWEEN ACRYLIC LAMINATE AND SUBSTRATE (PLYWOOD, MDF, PARTICLE BOARD) AFTER THE INSTALLATION?

There are many reasons which lead to air bubble problems are follow as:


- Bonding of Acrylic laminate under high humidity atmosphere
- Using of water base syrtheliaeasin adhesive or other than PVACP (Polyethylene Vinyl Acetate Co-polymer) adhesive may also lead to air bubble after the installation Acrylic laminate.
- Many of time due to uncertain weather conditions Substrate (Plywood, MDF, Particle Board) absorbed moisture. After few days of installation Acrylic laminate on substrate, substrate gradually loses moisture. The moisture is the result of air bubble between Acrylic laminate and substrate after installation
- Using odd uneven surface Substrate (Plywood, MDF, Particle Board) Lead to debone at particular area of Acrylic laminate sheet and air bubble appear at that area after the installation
- When more than 4'X 2' of Acrylic laminate is used for paneling, it can lead to air bubble after installation
- Lack of pressing and short period of pressing at the time of bonding period of Acrylic laminate also lead to air bubble after the installation of Acrylic laminate.
- GLOIRIO sheets should be kept evenly Straight. if the sheets are in roll form it Should kept straight for minimum 48 hours and then you can press and laminate on the surface for <u>better results</u>.


WHY YELLOW PATCHES AND COLOUR FADE PROBLEM APPEARS AFTER THE INSTALLATION OF ACRYLIC LAMINATE?

The reason behind this problem is as follows:

- When Acrylic laminate experiences or faces direct fall of sunlight on it which leads to discolouring, fading and yellowness in laminate.
- Using of inferior quality or not as per standard quality dipped plywood & dipped lipping patti may lose the colour due to chemical reaction between adhesive at the time of bonding period and yellow patches appear after the installation.
- Using synthetic rubber adhesive (SR / JatPat, Bostic, Heatex)
 lead to colour patches on Acrylic laminates.
- Prolonged exposure temperature above 30° cor placing hot cookware directly on the Acrylic laminates cause patches on Acrylic laminates surface.









TECHNICAL Specifications

Parameters	Glorio Acrylic Laminate	High Gloss Laminate Mica	PU Coating / Duco Paint	Back Painted Glass
Gloss Level	>90	>70	>85	>85
Scratch Proof	6H Antisractch	No	No	No
Color Consistency	Excellent	Not Good	Not Good	Not Good
Orange Peel	No	Yes	Yes	No
UV Resistance	Excellent	Bad	Bad	Bad
Water Resistance	Excellent	Bad	Bad	Excellent
DRY Heat Resistance	Excellent	Good	Bad	Bad
Volatile Organic	No	Yes	Yes	Yes
Compounds (VOCs)				

^{*}There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.

Size: 2440mm x 1220mm **Thickness:** (1.3mm - 1.5mm)









Design No. Design No. Colour Design No. Design No. Page No. Colour Page No. Colour Page No. Page No. Colour MARBLE GL-7701 36 GL-7804 38 **GL-7840** 34 **GL-7969** 10 POARPLE **GL-7702** 40 **GL-7805** 34 **GL-7841** 32 **GL-7970** 10 MARBLE **GL-7703** GL-7807 **GL-7843 GL-7971** 06 42 44 32 MARBLE Mirror GL-7972 **GL-7704** 30 **GL-7808** 32 GL-17901 02 16 MARBLE **GL-7705** 30 GL-7809 48 **GL-17902** 02 Mirror **GL-7973** 16 MARBLE **GL-7706** 40 GL-7810 44 GL-17903 02 **GL-7974** 12 Mirror **GL-7707** 40 GL-7811 **GL-17904** 02 **GL-7975** 12 36 MARBLE **GL-7976** 04 **GL-7708** 46 GL-7812 34 GL-17905 02 WOOD **GL-7709** 46 GL-7813 38 GL-7951 24 **GL-7977** 04 WOOD **GL-7710** 46 GL-7815 32 GL-7952 18 **GL-7978** 14 WOOD **GL-7979** GL-7711 46 **GL-7820** 36 **GL-7953** 22 14 WOOD WOOD **GL-7980 GL-7712** 40 GL-7821 38 **GL-7954** 26 26 WOOD WOOD **GL-7713** 30 **GL-7822** 48 **GL-7955** 20 **GL-7981** 26 WOOD **MATT GL-7824 GL-7956 GL-8101** GL-7714 30 44 24 50 WOOD **MATT GL-7715** 28 **GL-7825** 42 GL-7957 22 **GL-8102** 52 MATT **GL-7717** 46 **GL-7827** 44 **GL-7958** 24 **GL-8103** 50 WOOD MATT **GL-7718** 46 **GL-7828** 34 **GL-7959** 20 **GL-8104** 52 GL-7719 GL-7829 **GL-7960 MATT** 28 38 18 **GL-8105** 50 MATT GL-7830 GL-7961 50 **GL-7720** 46 38 80 **GL-8106** GL-7831 MARBLE **GL-7721** 40 44 **GL-7962** 10 **GL-8107** 50 **MATT** MARBLE **GL-7722** 28 GL-7832 48 GL-7963 80 **GL-8108** 52 **MATT** MARBLE **GL-7723** 40 **GL-7835 GL-7964 GL-8110** 52 **MATT** 28 80 MARBLE **GL-7724** 36 **GL-7836** 42 **GL-7965** 16 GL-8111 52 **MATT** √MARBLE/ GL-7801 **GL-7837 GL-7966 GL-8112** 50 **MATT** 34 42 14 GL-7802 32 **GL-7838** 36 GL-7967 12 **GL-8113** 52 **MATT** MARBLE GL-8114 GL-7803 48 GL-7839 **GL-7968** 06 50 **MATT** 38





























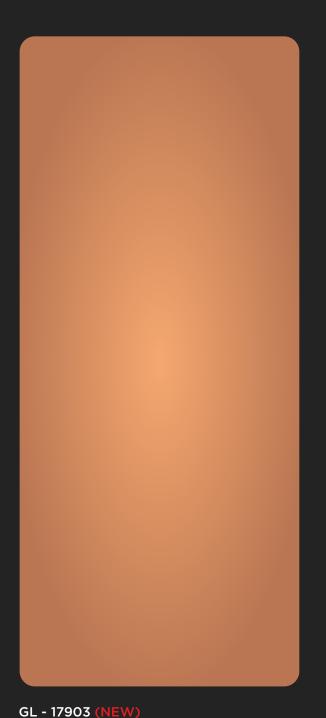

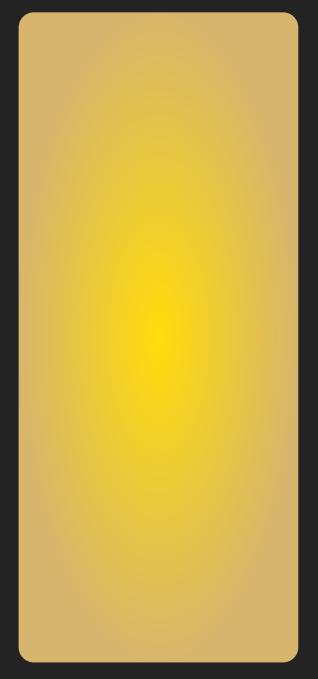



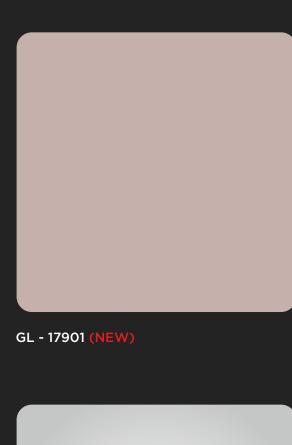




GL - 17904 (NEW)

GL - 17905 (NEW)

GL - 17902 (NEW)



SELFADHESIVE

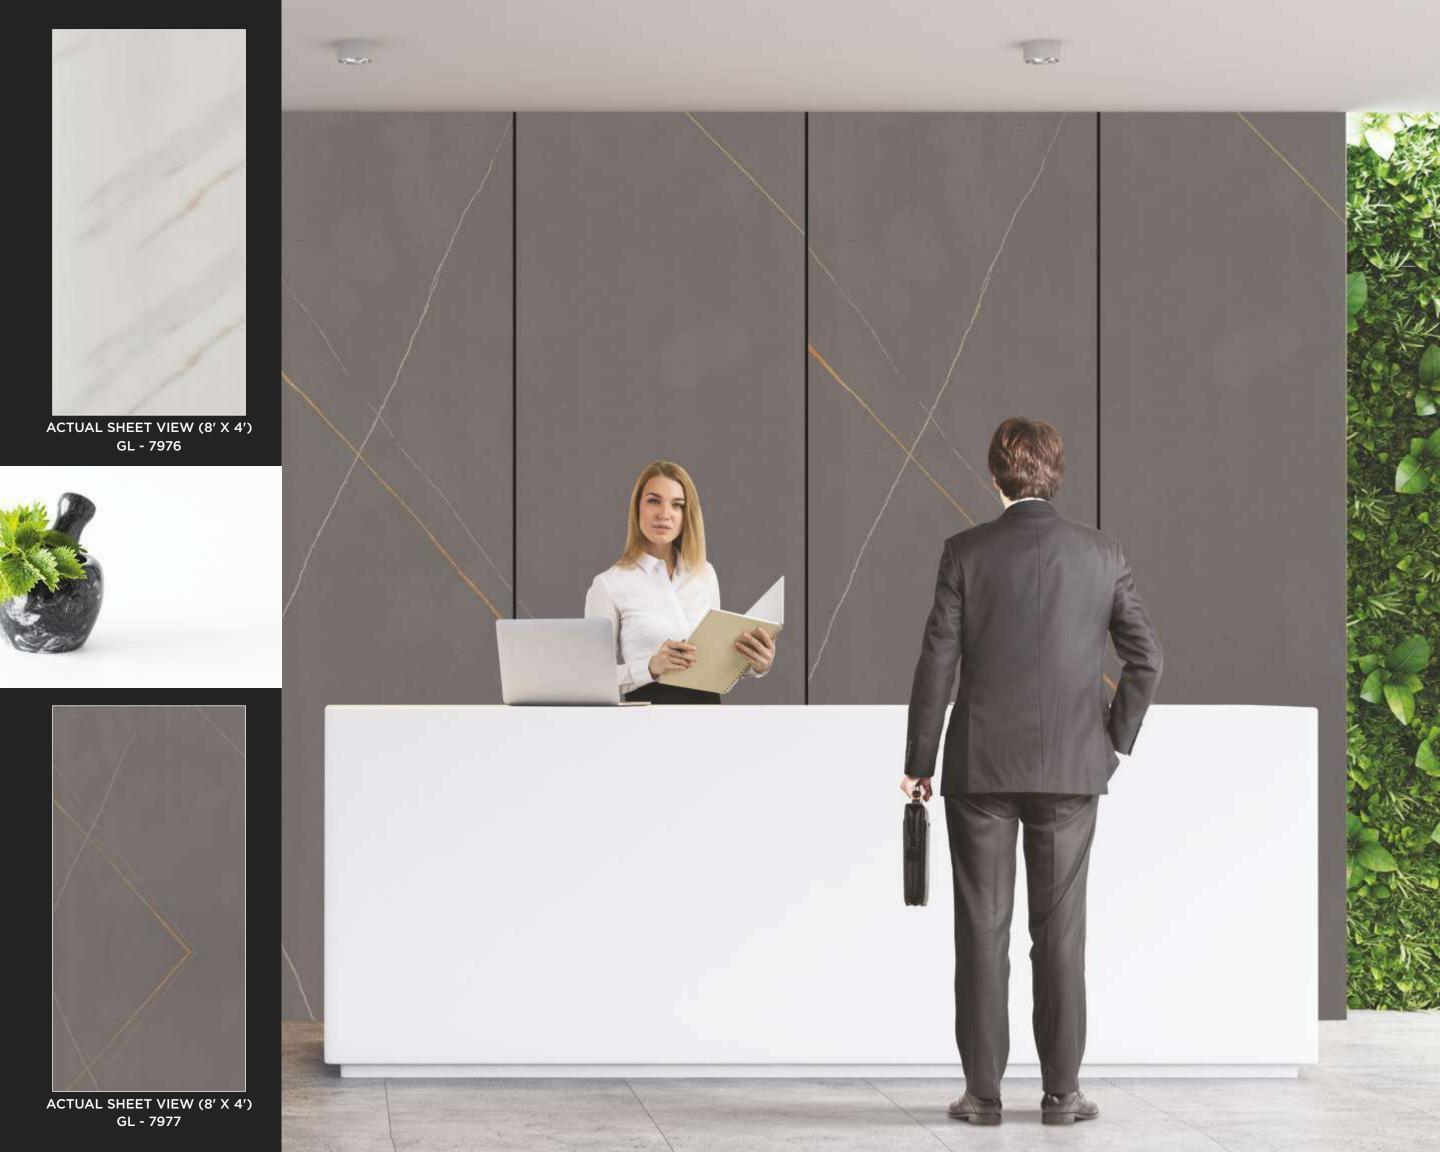


























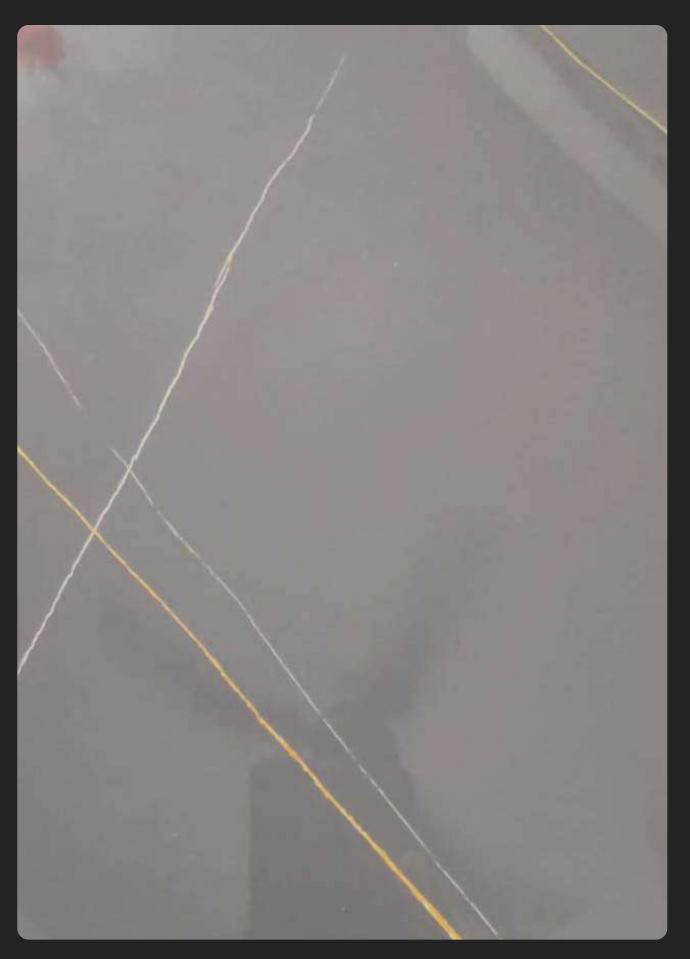

GL - 7976 (NEW) GL - 7977 (NEW)



































ACTUAL SHEET VIEW (8' X 4')
GL - 7961



ACTUAL SHEET VIEW (8' X 4') GL - 7963






























GL - 7961



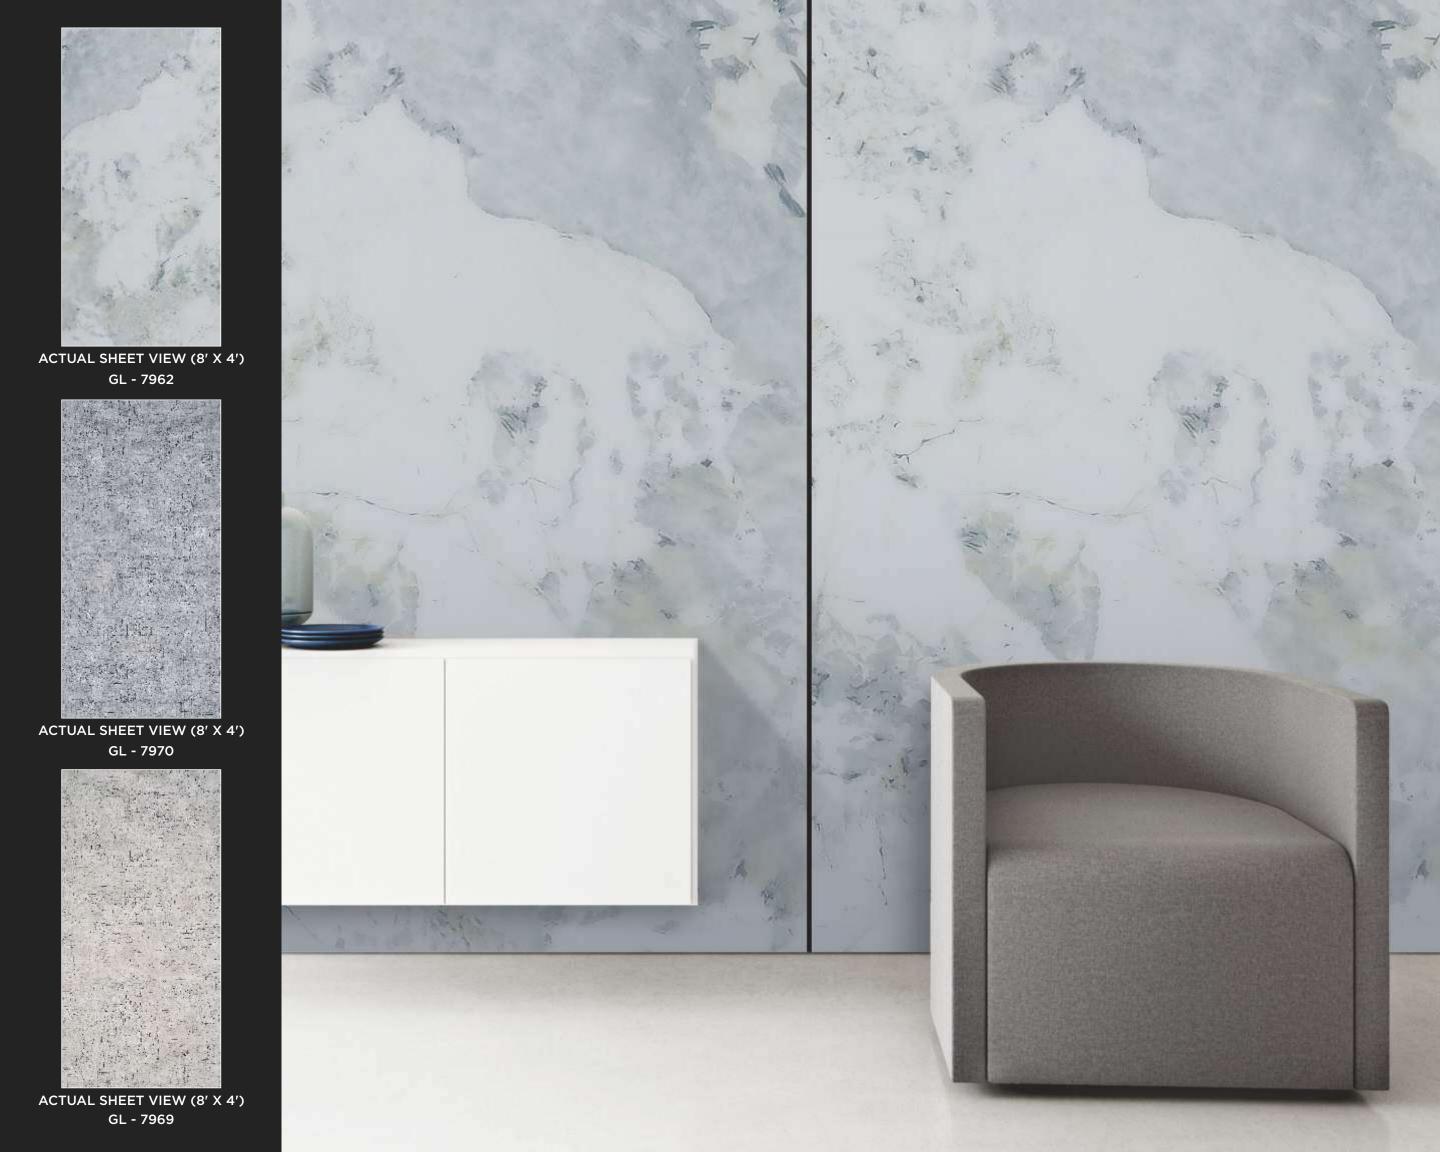



























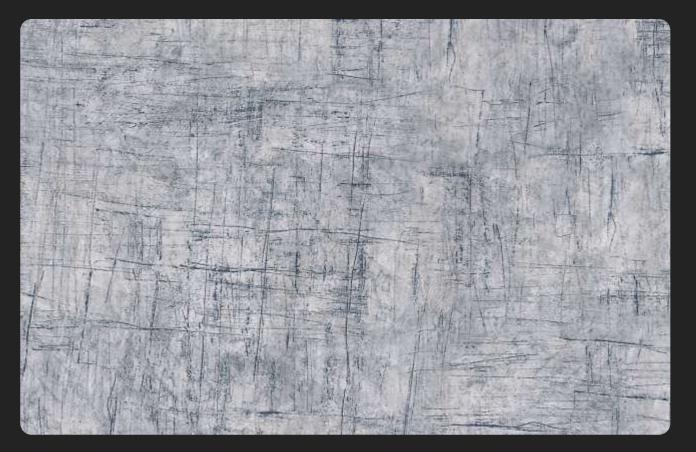

GL - 7970 (NEW)

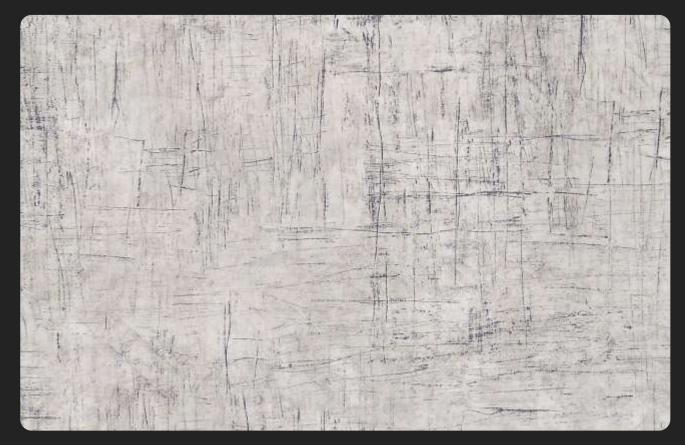

GL - 7962 (NEW) GL - 7969 (NEW)



ACTUAL SHEET VIEW (8' X 4') GL - 7974



ACTUAL SHEET VIEW (8' X 4') GL - 7975



ACTUAL SHEET VIEW (8' X 4') GL - 7967



























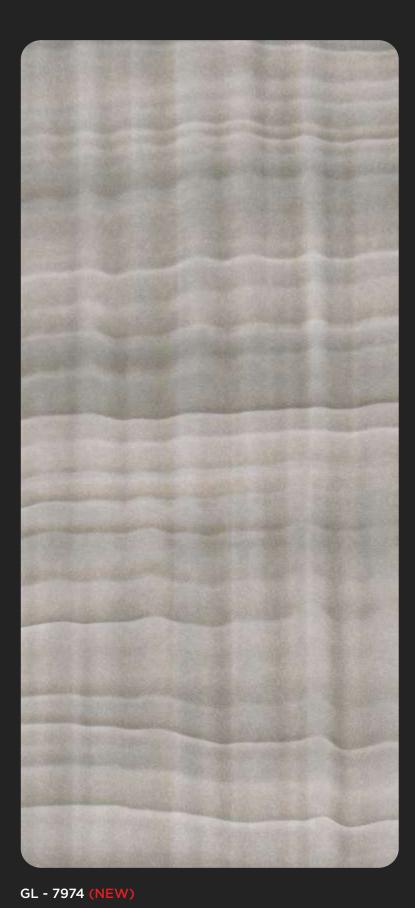

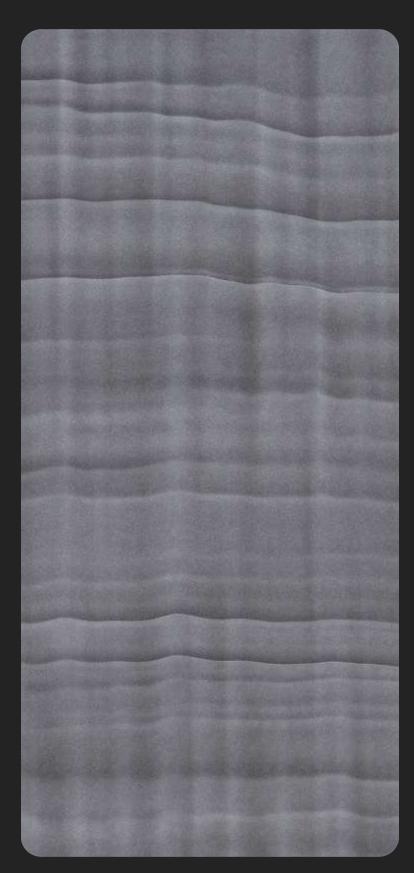



GL - 7975 (NEW) GL - 7967 (NEW)




























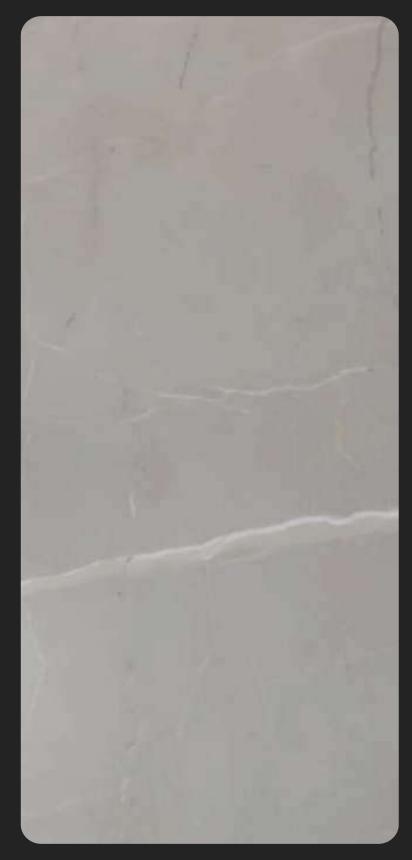

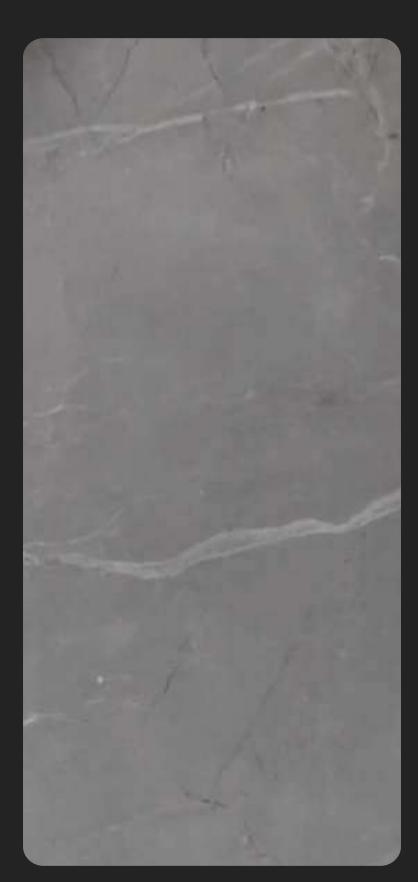

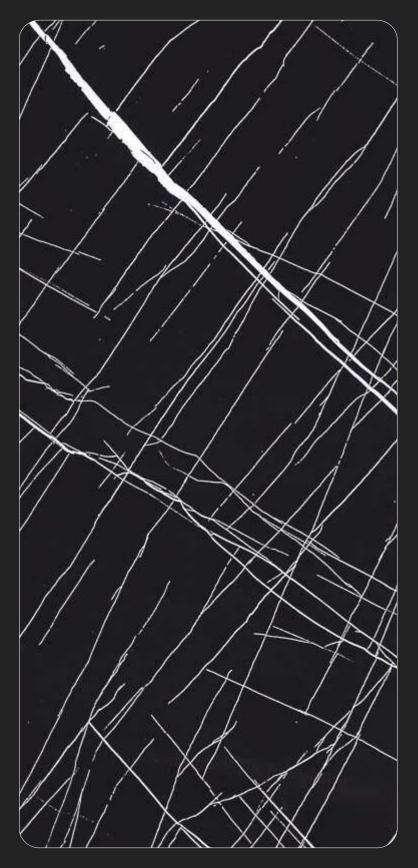

GL - 7978 (NEW) GL - 7979 (NEW)

GL - 7966 (NEW)



ACTUAL SHEET VIEW (8' X 4')



ACTUAL SHEET VIEW (8' X 4') GL - 7972



ACTUAL SHEET VIEW (8' X 4') GL - 7965























GL - 7965









GL - 7972 (NEW)

EDGE BAND





ACTUAL SHEET VIEW (8' X 4') GL - 7952


























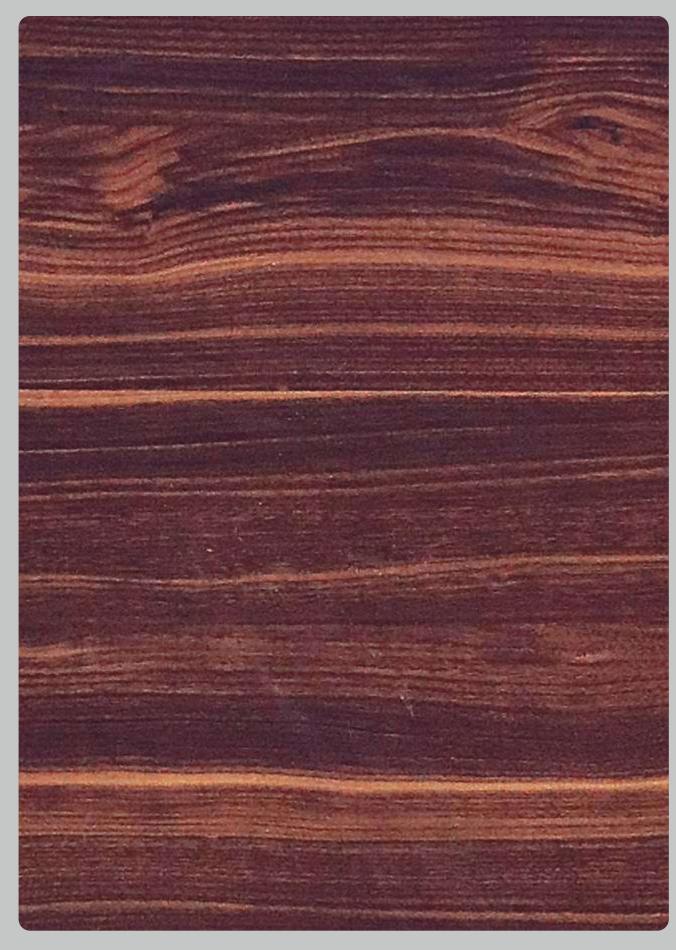




GL - 7960 (NEW) GL - 7952




ACTUAL SHEET VIEW (8' X 4') GL - 7959



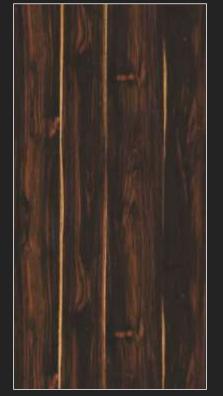

ACTUAL SHEET VIEW (8' X 4') GL - 7955

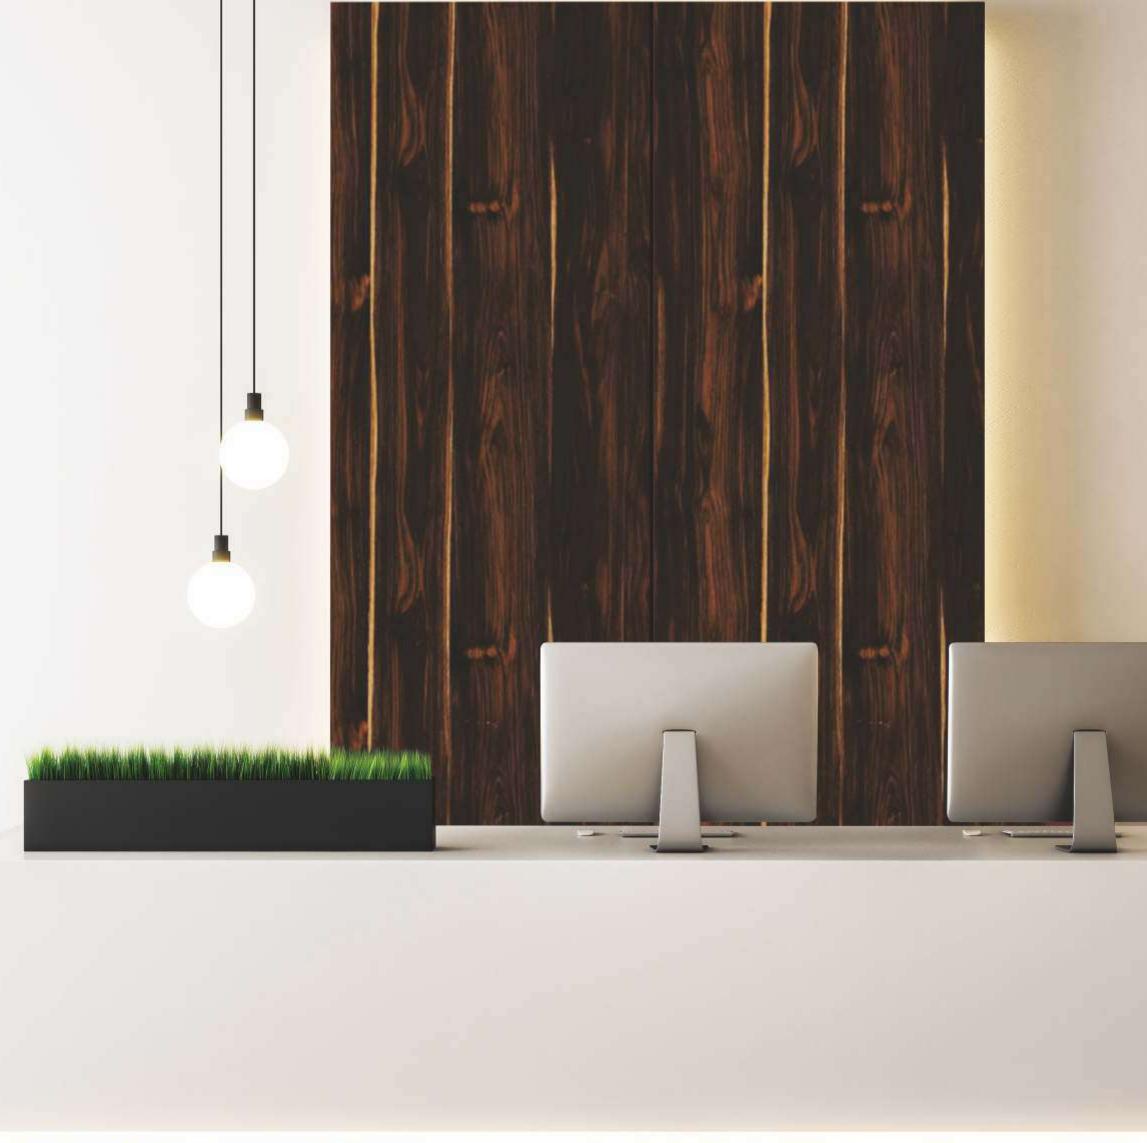
























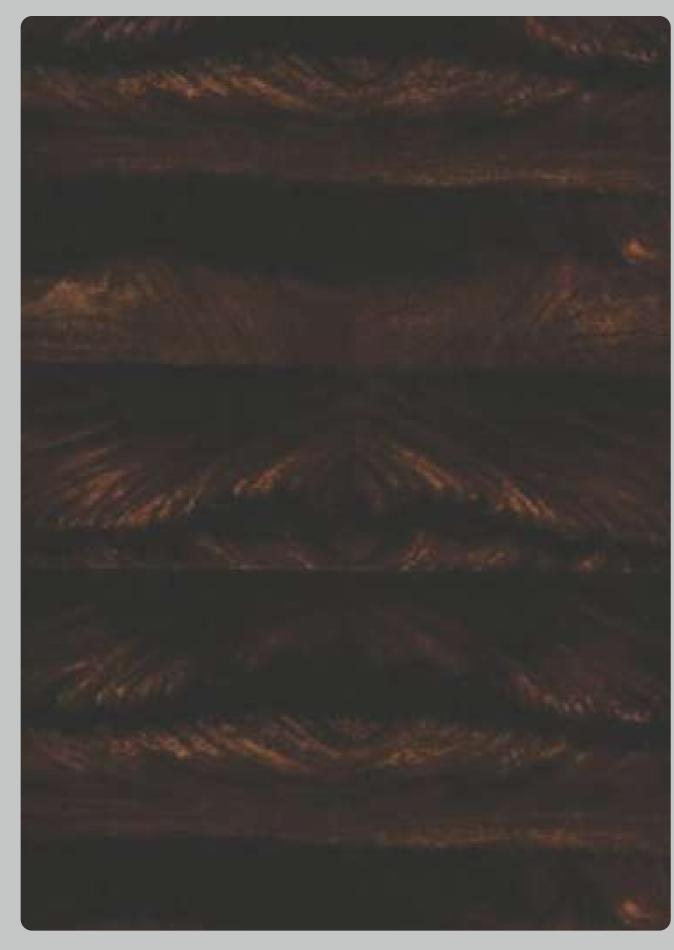



GL - 7959 GL - 7955



























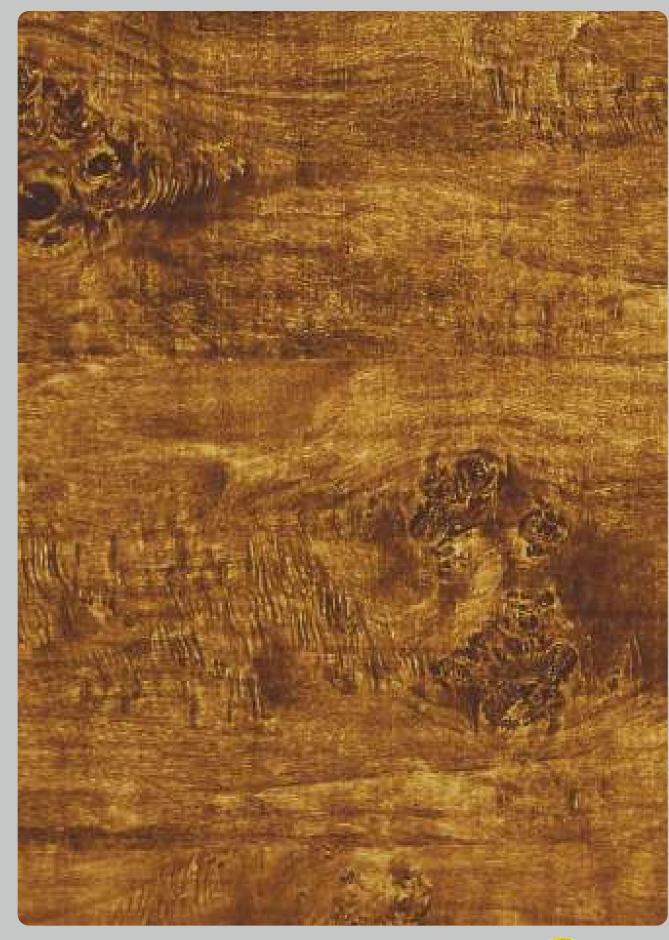







ACTUAL SHEET VIEW (8' X 4')
GL - 7958



ACTUAL SHEET VIEW (8' X 4') GL - 7956






























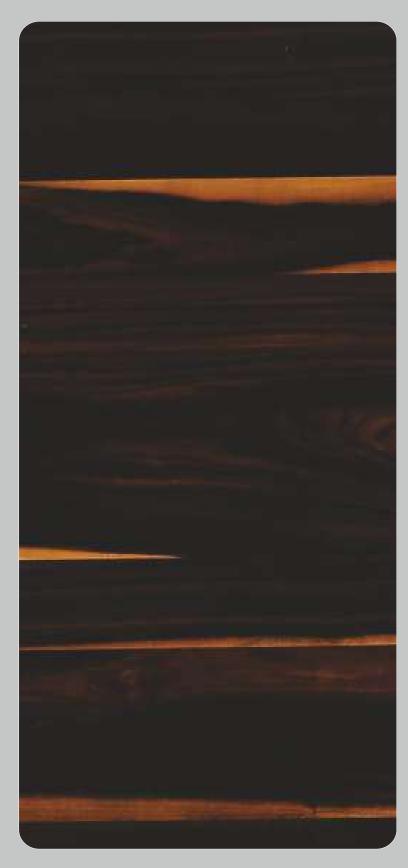










GL - 7956

GL - 7958






























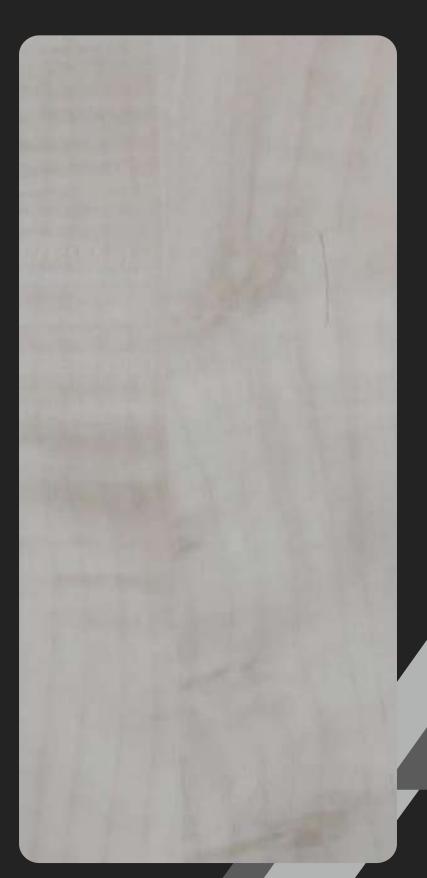



GL - 7981 (NEW) GL - 7980 (NEW)

GL - 7954




























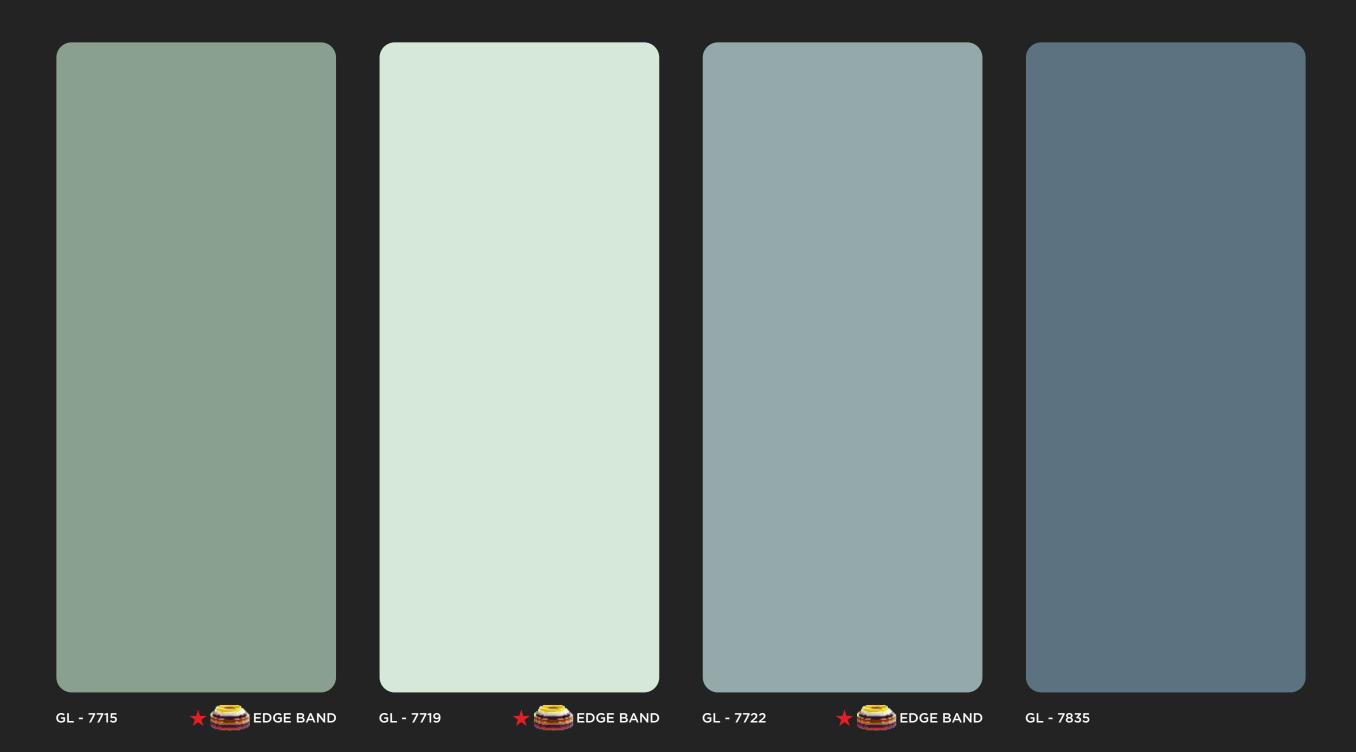



A magnificent blend of luxury and simplicity
























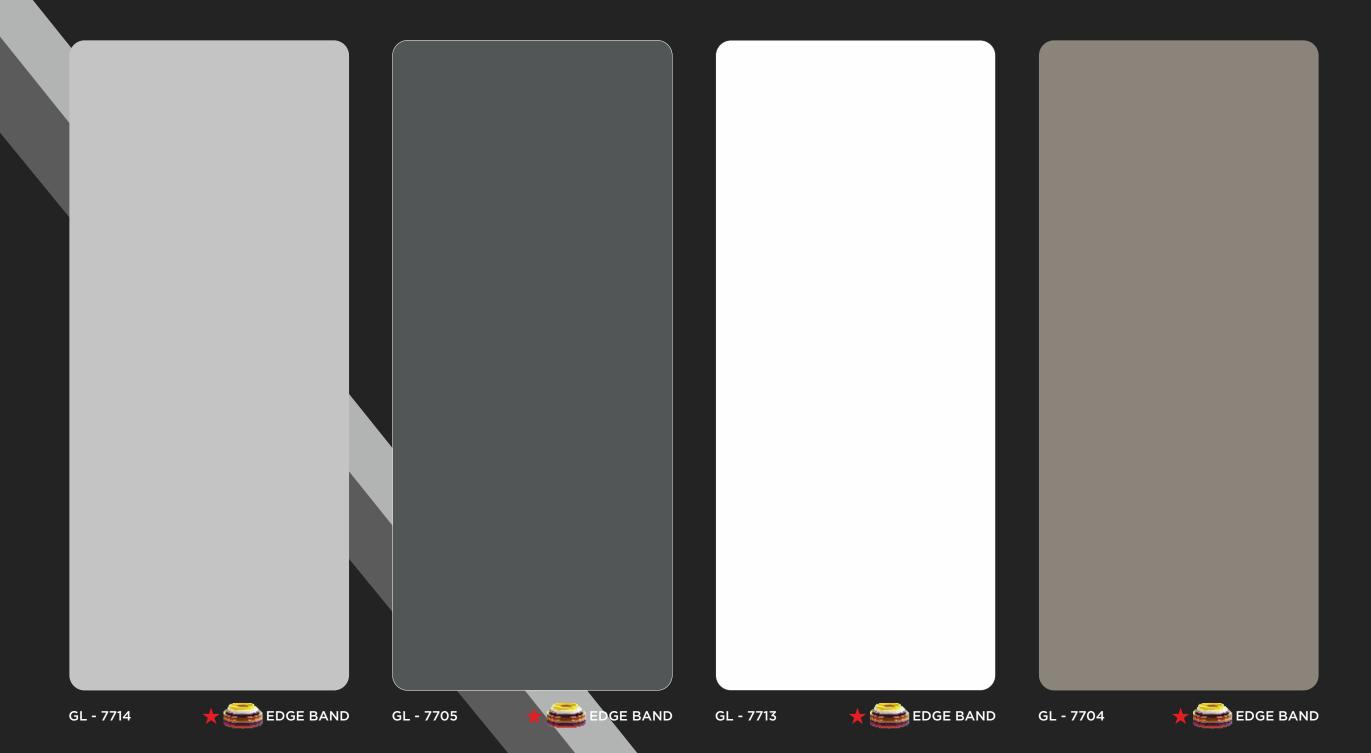




























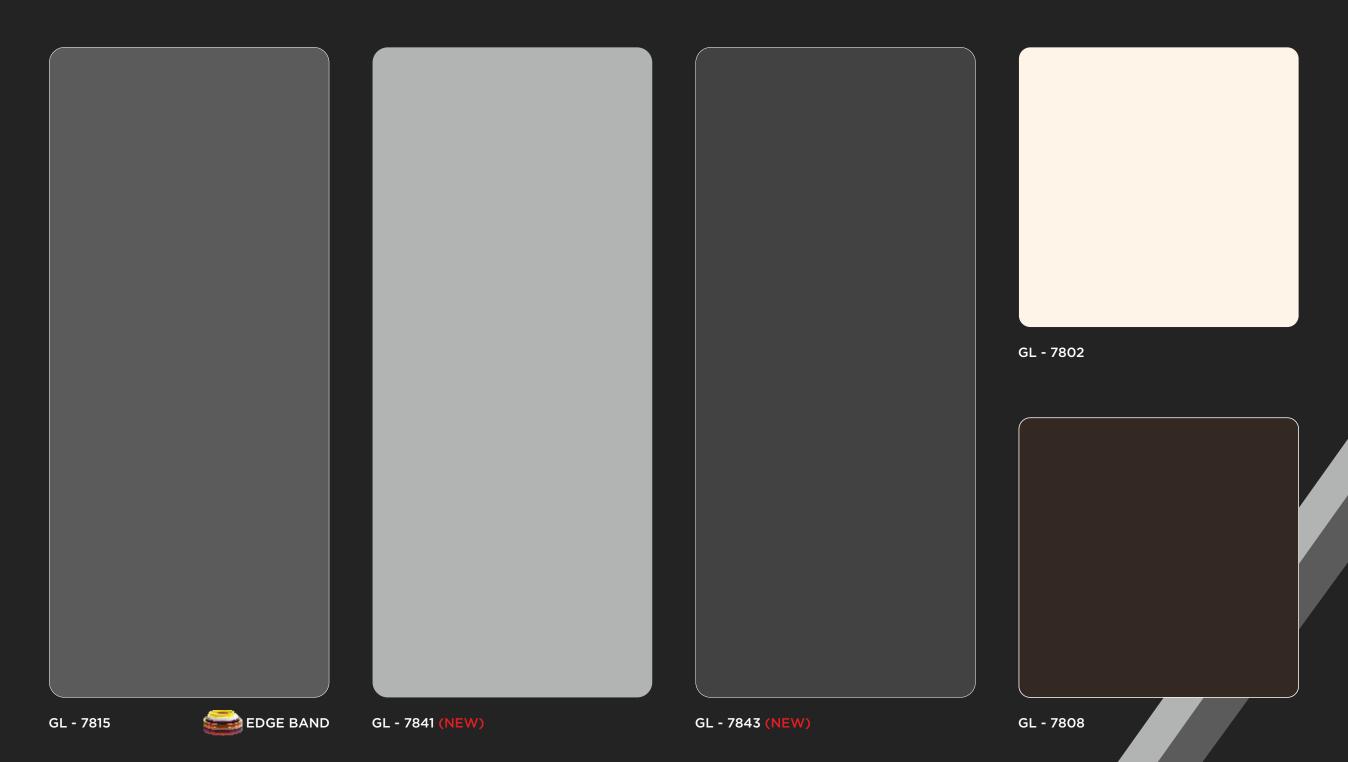






























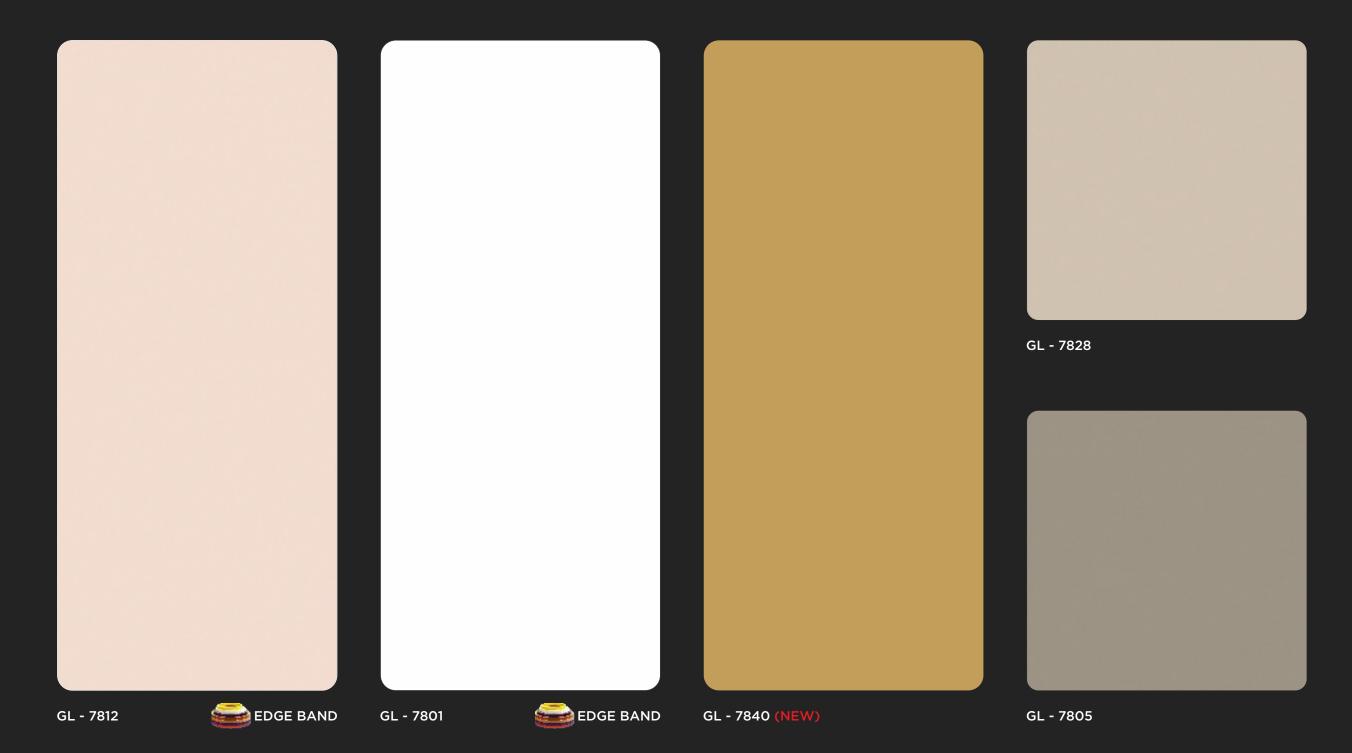



A unique approach for making your spaces look more inviting (trees, (CENTER) Channel


























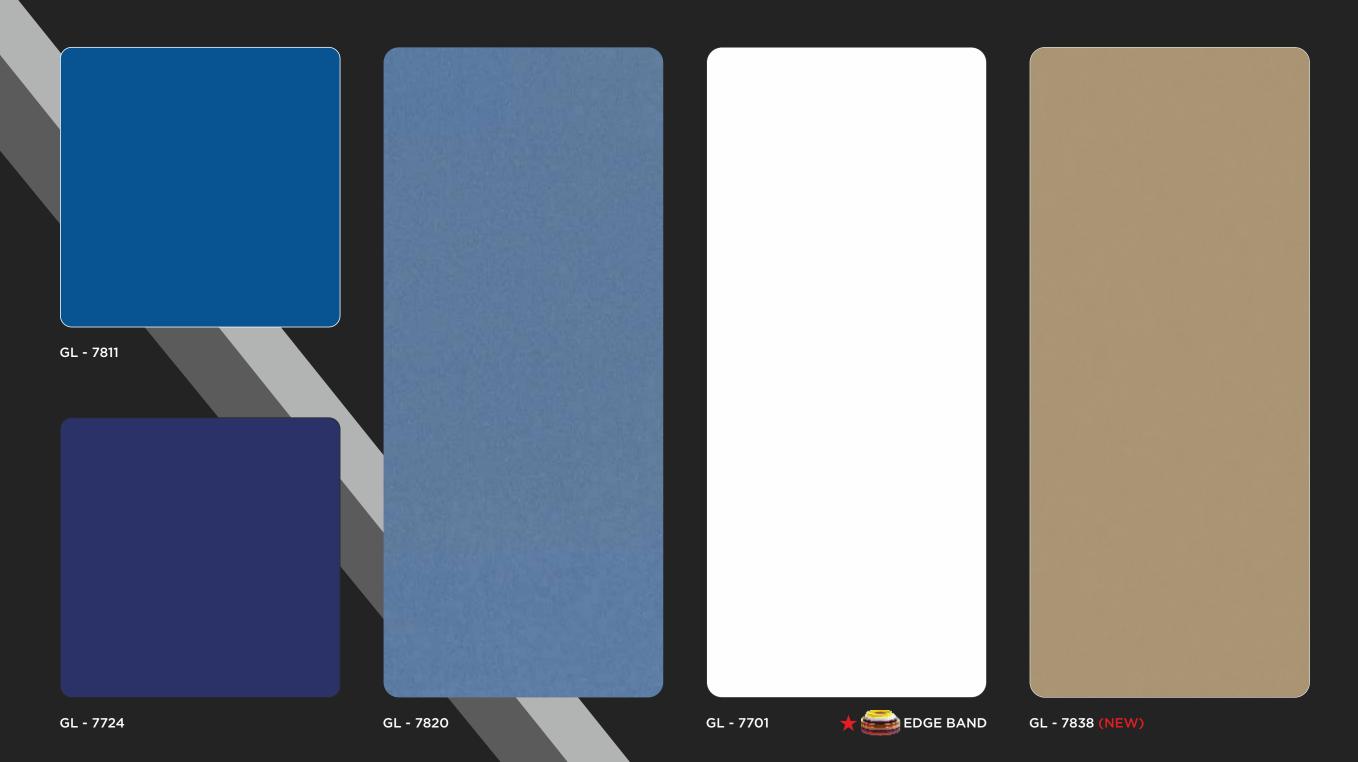








































GL - 7821





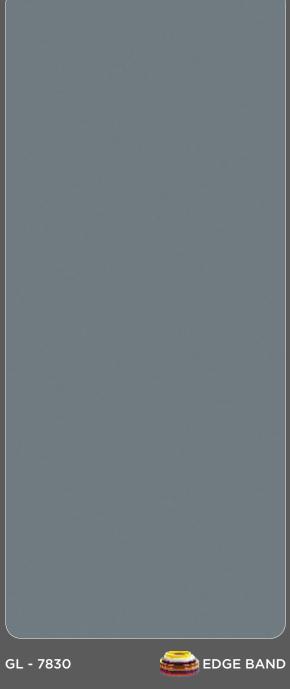

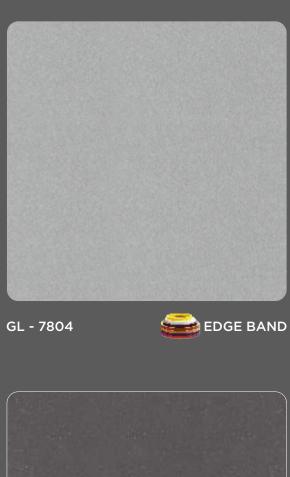

GL - 7829






























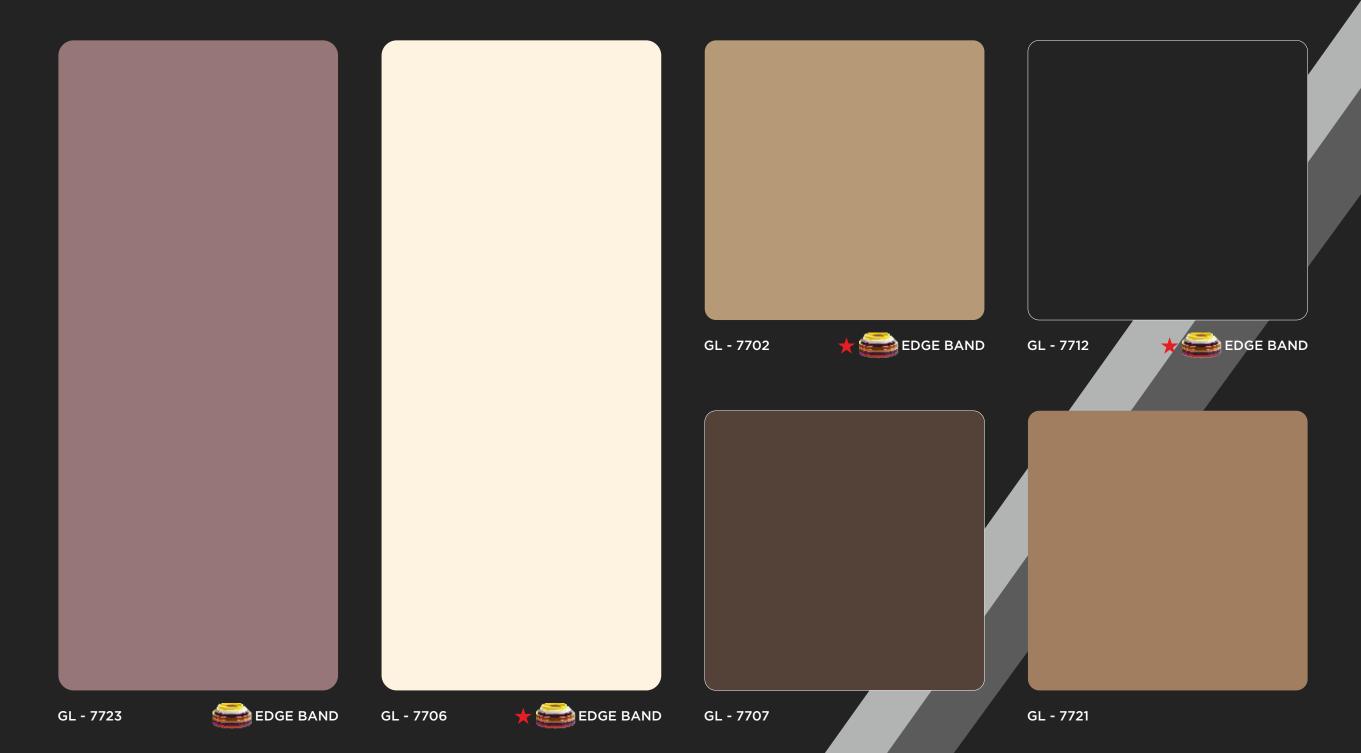




























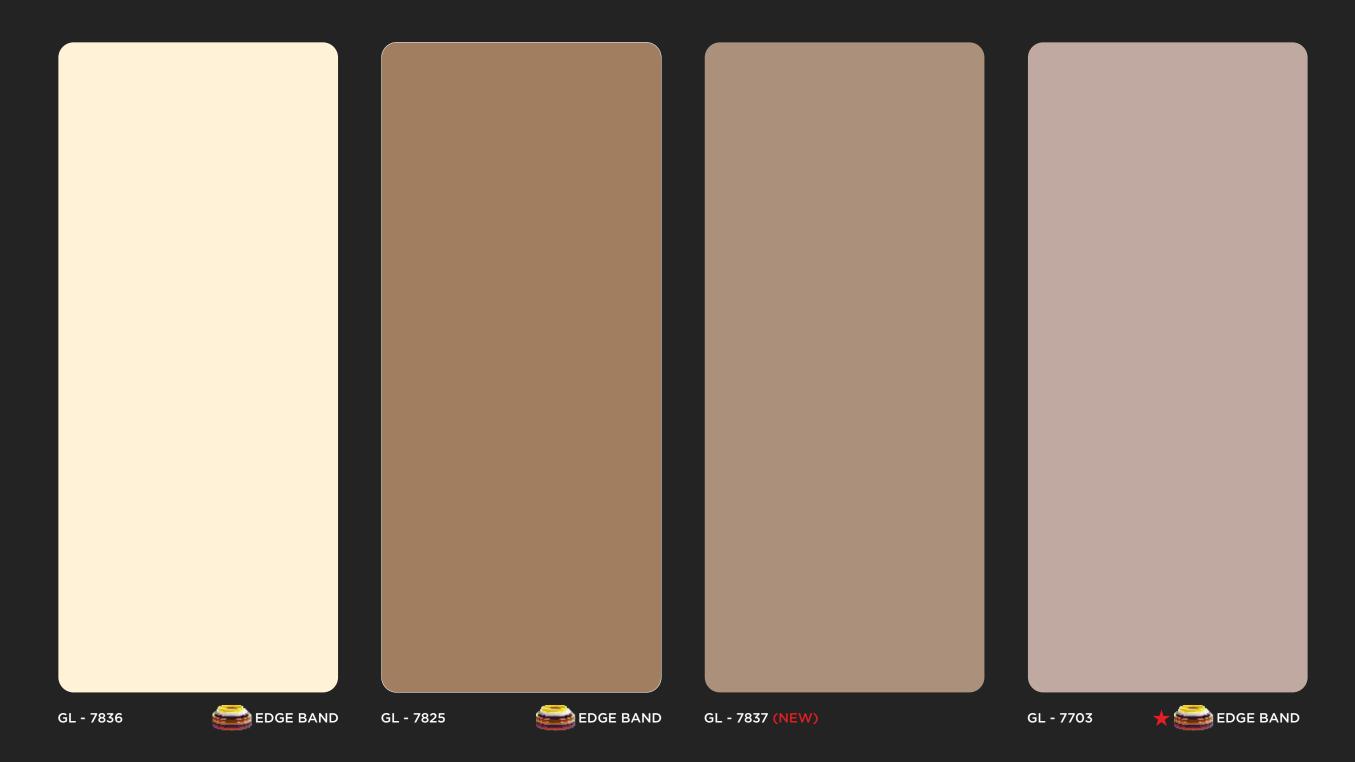


























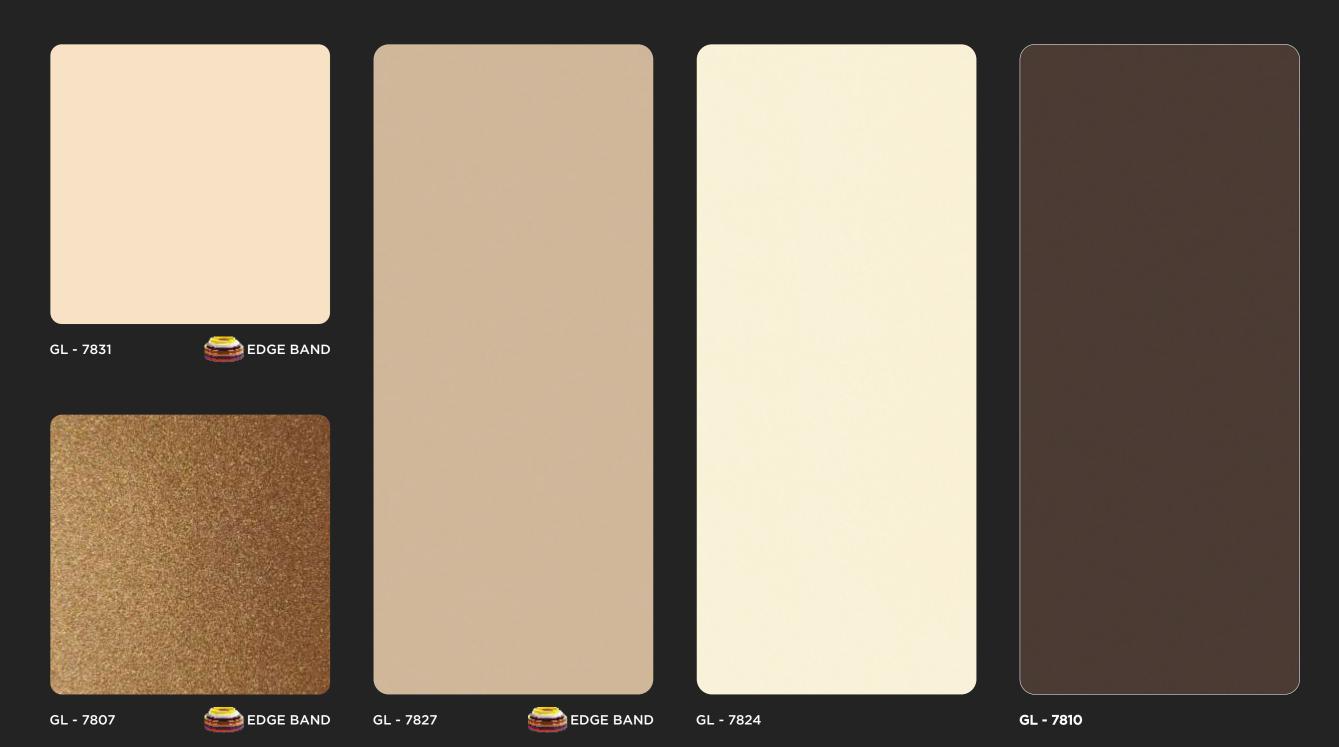



Something extremely good or outstanding IIIII E SALL




















































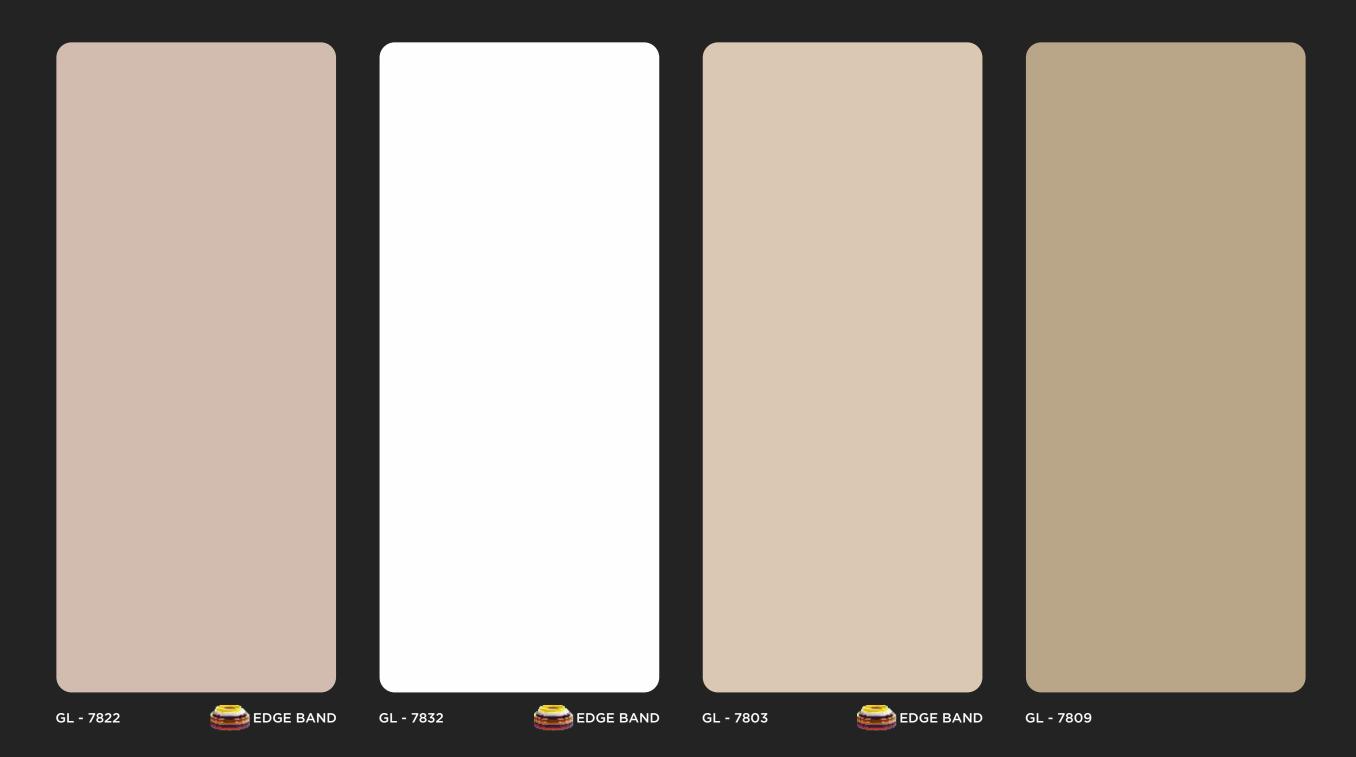




























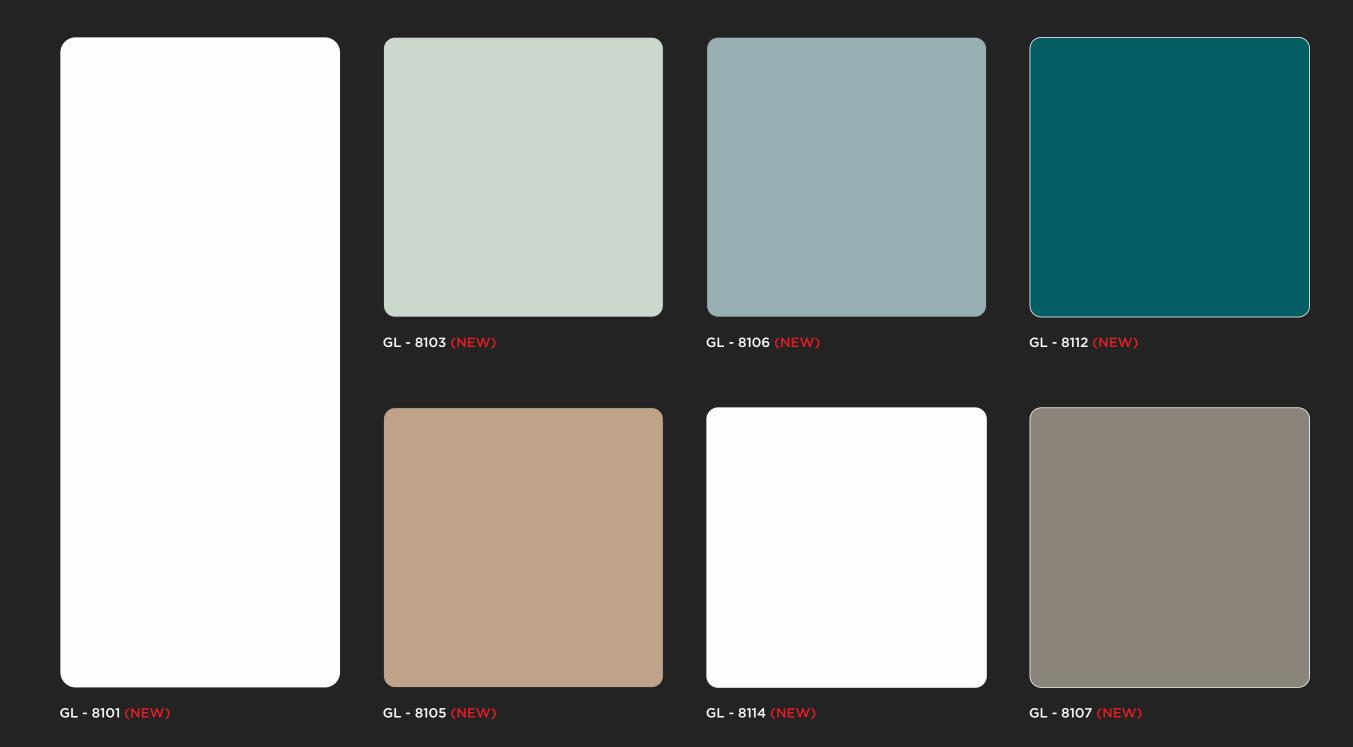



MATT FINISH


























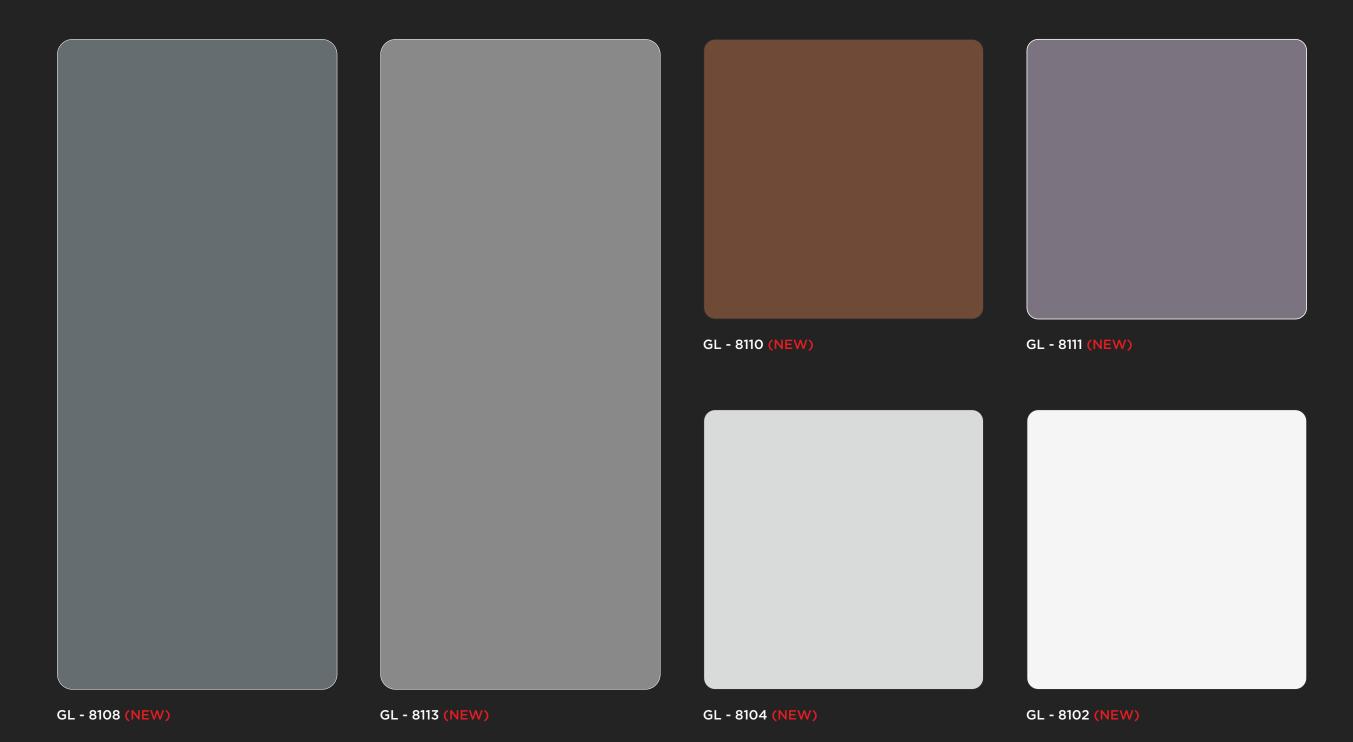



MATT FINISH



EDGE BAND

PRODUCT DESCRIPTION



We have gain specialization in the market for proposing our clients with an enormous collection of Edge Banding Tapes. They are used for smoothing the edges of furniture and other materials for their safer utilization. Thee tapes are light weight and can easily be carried from place to place. They also give a fine and elegant finish to the furniture. They are water proof and prevent the furniture from physical impact as well. The Edge Banding tapes are fire resistance and have accessibility in varied thicknesses and widths to cope with various needs of users. They are reliable too.



FEATURES OF EDGE BANDING TAPES:

- Used for concealing panels as well as furniture's edges.
- Accommodate in giving a clean and solid look to the product.
- · colors match with concerned products such as laminates etc.
- Are acquirable in assorted color shades.

PREMIUM SERIES

(NEW)

23MM / 1.3MM THICKNESS




GEB - 3922

GEB - 3915 GEB - 3919



(NEW) 22MM / 0.8MM THICKNESS

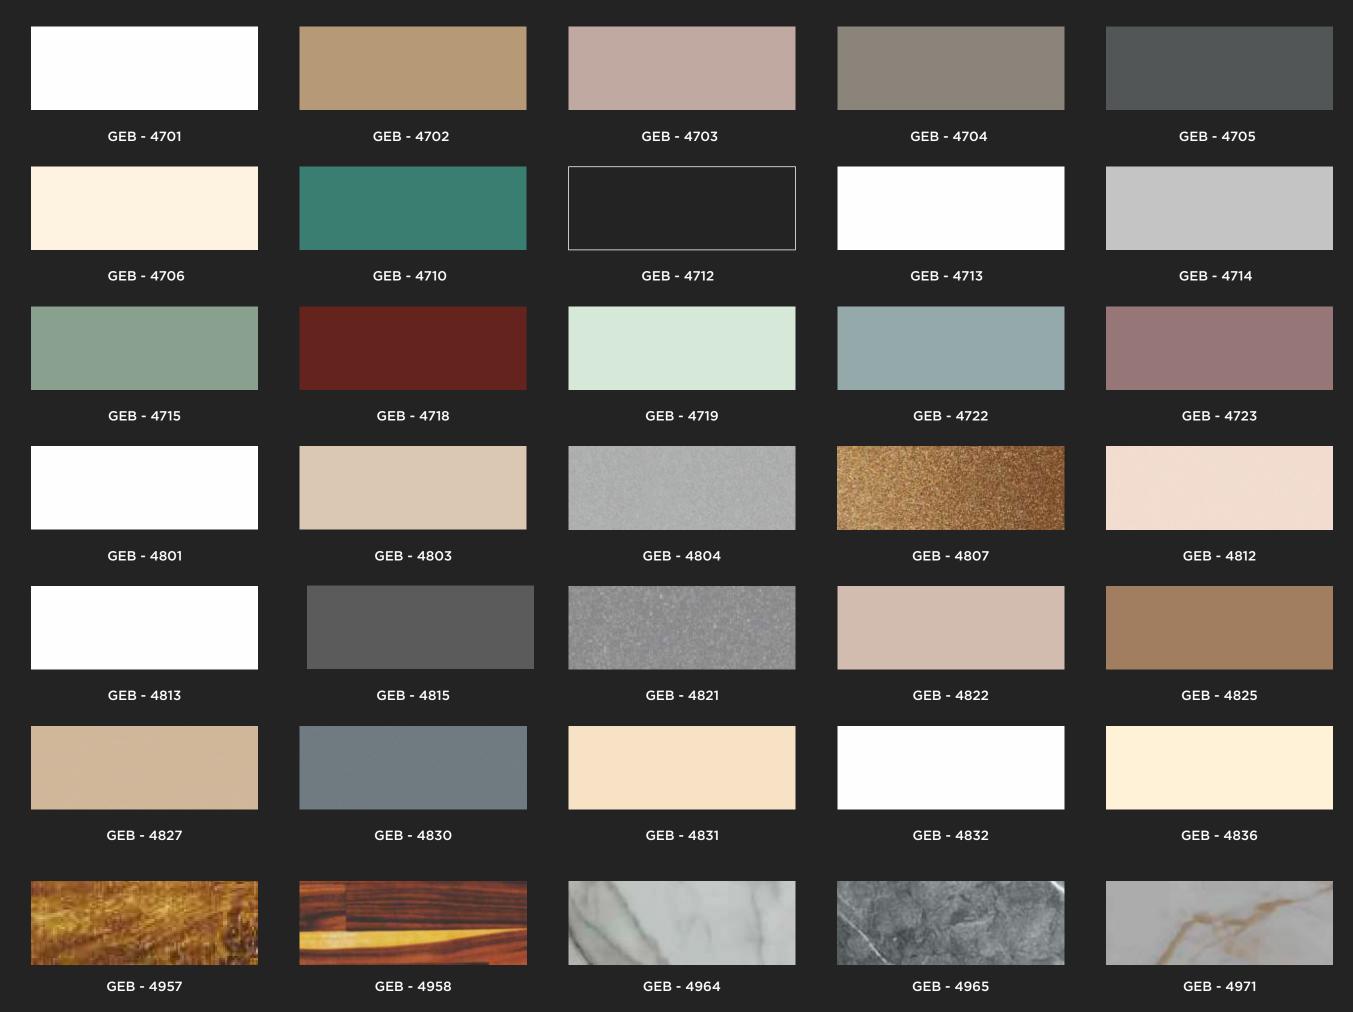



OUR PRODUCTS -













ALABASTER











Soft sile Rich
















For more details subscribe to our YouTube channel 'Gko YouGUE DECOR' for information about products, its installation and new exciting offers

